
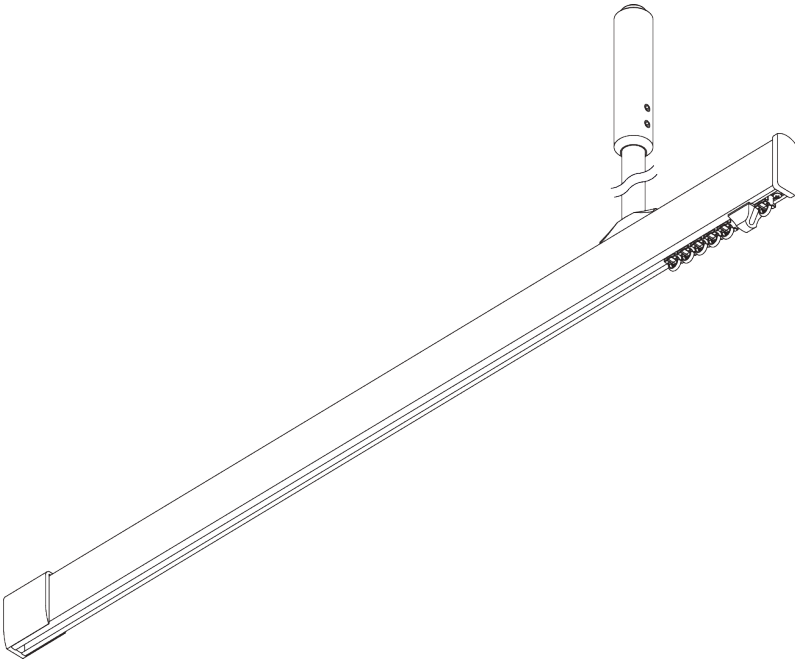


SG 6100



PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S - L
- **Fitting:** suspended, ceiling, wall
- **Colours:** white RAL 9016, black RAL 9005 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Universal room divider
- 2-component (2C) glider technology
- Wave (2C)
- Suspended
- Versatile layouts
- Bendable
- White paint incorporates anti-microbial coating as standard

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 6101

Profile

Radius:
20 cm, >25 cm

B. HOW TO MEASURE

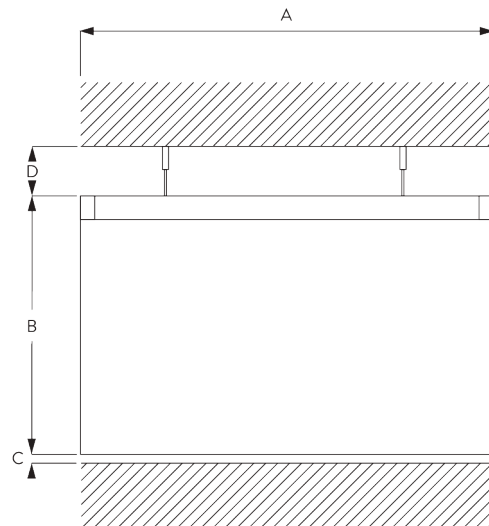

A: System width
B: System height
C: Distance between floor and fabric
D: Distance between ceiling and system

C. SPECIFICATION TEXT


Silent Gliss SG 6100 Cubicle Track System. Comprises aluminium profile SG 6101 in satin anodised / white / black powder coated finish supplied made to measure with nylon glider hook SG 6147 at 10/m. Installed with the following parts depending on the system configuration: Delrin wall support SG 6609 / Dust cover SG 6110 / Ceiling fix bracket SG 6137 / Wall bracket SG 6503 / T bracket SG 6514 / Twist fixing plate SG 6124 / Ceiling fix bracket SG 6138 / Ceiling support SG 6175 / Internal bridge SG 6199 / Connecting bridge SG 6512 / Cross connection SG 6525 / End cover SG 6611 / Hanger rod SG 6190 / V-hanger rod SG 6501.

FITTING


A. FITTING INFORMATION

For detailed fitting information, visit the [Silent Gliss website](#).


Fixing points




Dust cover




Site preparation for suspended ceiling applications



6190



6501




- Fixings should support the ends of the profile and any changes in direction.
- Maximum span between fixings is 3000 mm.
- When fitting to suspended ceilings site preparation is critical.
- At each hanger position a noggin in approved material is required above the suspended ceiling; underside to rest on top of ceiling (but independently supported) with a minimum length of 300 mm at right angles to the track in which the hanger occurs to give fixing tolerance.
- Ideally the hangers should be on the return track, if on the front track then adequate support should be provided.
- A detailed information sheet is available on request.


Diagonal fixing supports can be used to return the hanger to the bedhead wall, but only for use when it is impossible to ceiling fix.

B. CEILING FITTING

Hanger SG 6190

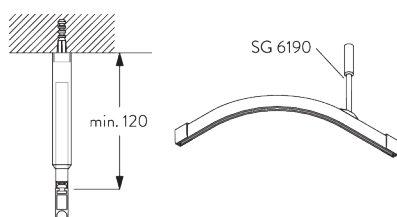



Can also be fixed in suspended ceilings by using sleeves SG 6187 & SG 6188.



SG 6190

Hanger



Mini hanger SG 6175



SG 6175

Mini hanger


Bracket SG 6124




SG 6124

Bracket


V-hanger

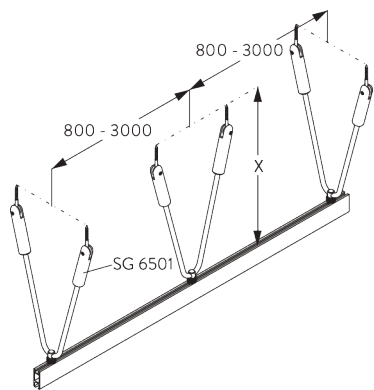


SG 6501:
V-hangers provide additional lateral stability.



SG 6501
V-Hanger

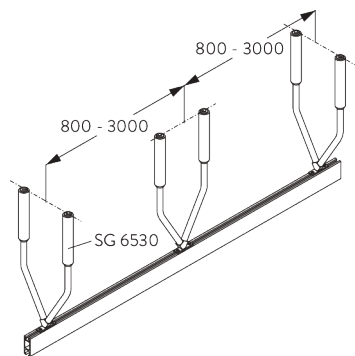


SG 6530:
V-hangers provide additional lateral stability.



SG 6530
V-Hanger


C. WALL FITTING

Smart Fix




Smart Fix with slot SG 11206 - SG 11208:

Screw SG 10492 (M4x8) needed.



Square Smart Fix with slot SG 11216 - SG 11218:


Screw SG 10492 (M4x8) needed.

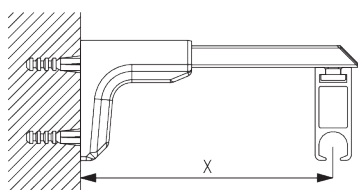

Universal Smart Fix SG 11154 - SG 11156:

Screw SG 11131 (M4x6) needed.

Smart Fix	X mm
SG 11206 / SG 11216	33-51
SG 11207 / SG 11217	53-71
SG 11208 / SG 11218	73-91
SG 11154	102-130
SG 11155	132-160
SG 11156	182-210



SG 6117

Slot nut




SG 10492

Pan head screw M4x8




SG 11131

Pan head screw with flange
M4x6




SG 11206

Smart Fix with slot 60 mm




SG 11207

Smart Fix with slot 80 mm




SG 11208

Smart Fix with slot 100 mm




SG 11216

Square Smart Fix with slot 60
mm




SG 11217

Square Smart Fix with slot 80
mm




SG 11218

Square Smart Fix with slot
100 mm




SG 11154

Universal Smart Fix 120 mm



SG 11155



Universal Smart Fix 150 mm



SG 11156


Universal Smart Fix 200 mm

Wall support SG 6610




SG 6610
Wall support

Bracket SG 6503

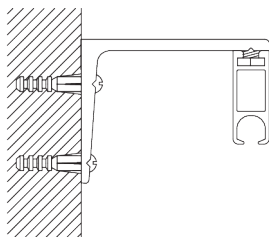



Bracket SG 6503 is available in various sizes, enquire at Silent Gliss.




SG 6503
Bracket

D. PROFILE
JUNCTIONS

Connection bridges
SG 6123 & SG 6514


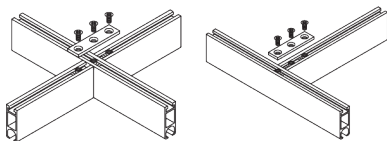


SG 6123
Connection plate




SG 6514
T-Junction

Connecting bridge
SG 6512

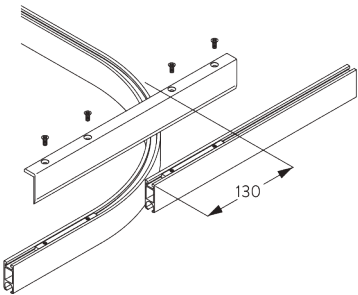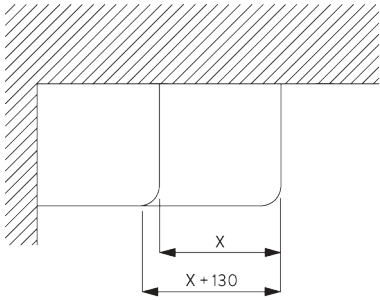


Note: be sure to attach a sketch!




SG 6512
Connection bridge

SYSTEM OPTIONS


A. LAYOUT OPTIONS



A: Hanger rod
B: Wall support





A: Hanger rod
B: Wall support

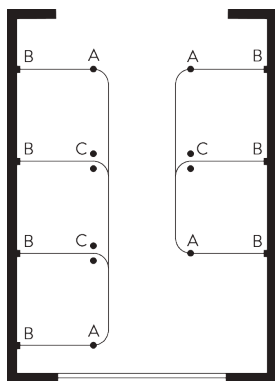

A: Hanger rod
B: Wall support
C: V-hanger

B. WAVE




SG 11295

SG 11302

Standard components:

- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm

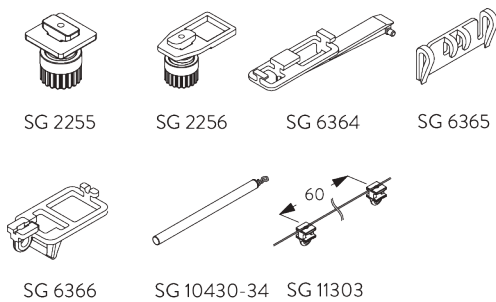

SG 2255

SG 2256

SG 6364

SG 6365


SG 6366

SG 10430-34

SG 11303

Optional components (min. radius >25 cm):

- SG 2255 Brake
- SG 2256 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm

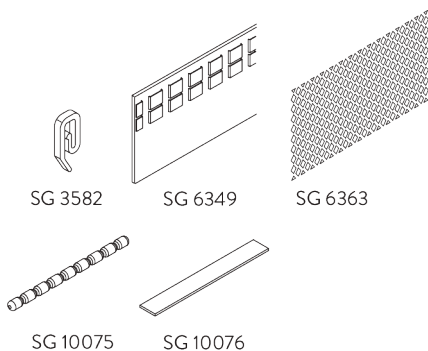

SG 3582

SG 6349

SG 6363



SG 10075

SG 10076

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C glider cord (standard components)

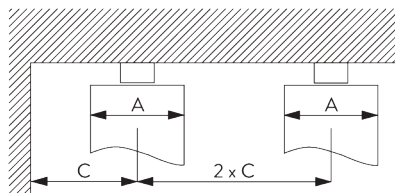

A = Stack depth
B = Stack size
C = Min. distance




2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80










*Stack size B when using optional extension arm SG 6364
increases by 95 mm per curtain stack!











PARTS









A. STANDARD PARTS

	SG 6065 End stop
	SG 6086 Spring stop
	SG 6101 Profile
	SG 6143 Glider on strip
	SG 6190 Hanger
	SG 6610 Wall support
	SG 6611 End cover

B. OPTIONAL PARTS

	SG 2255 Brake
	SG 2256 Brake
	SG 3582 Hook
	SG 3599 Hook
	SG 6094 Roller
	SG 6098 Roller
	SG 6110 Dust cover
	SG 6112 Connection bridge
	SG 6115 Bracket
	SG 6117 Slot nut
	SG 6123 Connection plate
	SG 6124 Bracket
	SG 6137 Bracket
	SG 6138 Bracket

	SG 6146 Hook
	SG 6147 Glider with hook on strip
	SG 6175 Mini hanger
	SG 6187 Sleeve
	SG 6283 Roller
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape
	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod
	SG 6501 V-Hanger
	SG 6503 Bracket
	SG 6512 Connection bridge
	SG 6514 T-Junction

	SG 6530 V-Hanger		SG 11207 Smart Fix with slot 80 mm
	SG 10075 Lead weight 50 g/m		SG 11208 Smart Fix with slot 100 mm
	SG 10076 Fabric weight		SG 11216 Square Smart Fix with slot 60 mm
	SG 10430 Draw rod 50 cm		SG 11217 Square Smart Fix with slot 80 mm
	SG 10431 Draw rod 75 cm		SG 11218 Square Smart Fix with slot 100 mm
	SG 10432 Draw rod 100 cm		SG 11295 End stop
	SG 10433 Draw rod 125 cm		SG 11302 Wave 2C glider cord 80 mm
	SG 10434 Draw rod 150 cm		SG 11303 Wave 2C glider cord 60 mm
	SG 10492 Pan head screw M4x8		
	SG 11131 Pan head screw with flange M4x6		
	SG 11154 Universal Smart Fix 120 mm		
	SG 11155 Universal Smart Fix 150 mm		
	SG 11156 Universal Smart Fix 200 mm		
	SG 11206 Smart Fix with slot 60 mm		