


MOTORS AND CONTROLS

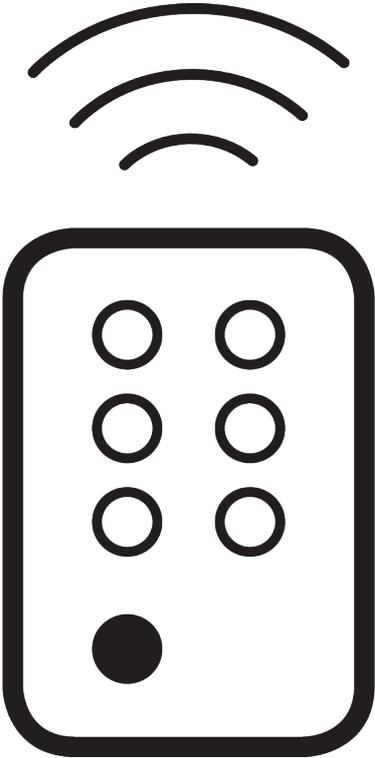



GENERAL NOTES

- *Installation by qualified fitter only.*
- *All radio installations must be installed according to local regulations.*
- *Electrical installations must be carried out according to Silent Gliss wiring diagrams.*
- *Check space for cables and plugs!*

APPLICATION CHART

<u>PAGE</u>	<u>SYSTEM</u>
5	SG Control A
11	SG Control N
19	SG Control R
25	SG Smart

SG Control A

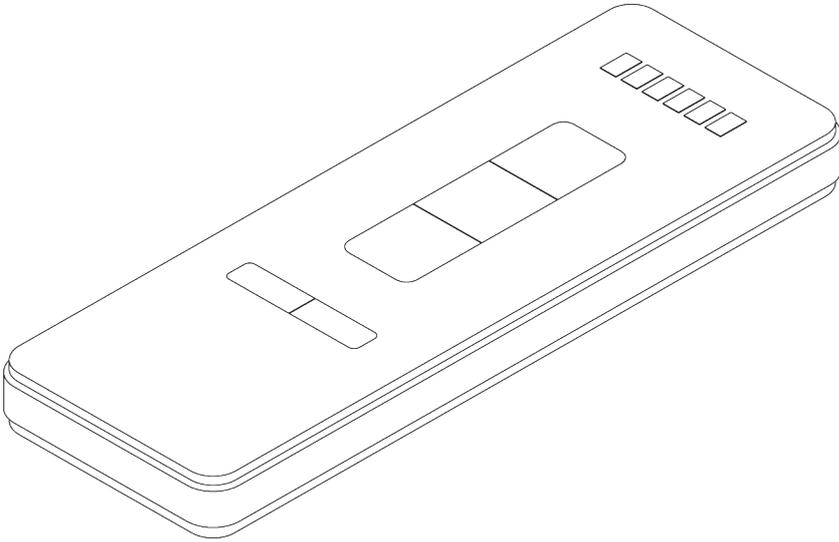

PRODUCT INFORMATION

- *Radio controlled*
- *1-channel, 2-channel, 5-channel or 6-channel radio controls*
- *Radio hand held and wall controls*
- *Single and multi channel timer units*


APPLICATION

A. SYSTEMS

– Electric curtain track system SG 5100

OVERVIEW COMPONENTS

A. RADIO CONTROLS




SG 10946

- **Channel:** 1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

Features:

- Operates single system or operates one group of systems




SG 10947

- **Channel:** 2+1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

Features:

- 2 channel: operates up to two single systems individually
- 2 channel: operates up to two groups of systems individually
- 1 channel: operates all systems together




SG 10948

- **Channel:** 6+1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

Features:

- 6 channel: operates up to 6 single systems individually
- 6 channel: operates up to 6 groups of systems individually
- 1 channel: operates all systems together

B. RADIO WALL CONTROLS




SG 10949

- **Channel:** 1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

Features:

- Operates single system or operates one group of systems




SG 10950

- **Channel:** 2 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

Features:

- 2 channel: operates up to two single systems individually
- 2 channel: operates up to two groups of systems individually




SG 10951

- **Channel:** 5+1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

Features:

- 5 channel: operates up to 5 single systems individually
- 5 channel: operates up to 5 groups of systems individually
- 1 channel: operates all systems together

C. RADIO TIMER UNITS




SG 11429

- **Channel:** 1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

Features:

- Operates single system
- Operates one group of systems
- LCD display
- Touch button control
- Single 'open' and 'close' time setting



SG 11093

- **Channel:** 16 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

Features:


- 16 channel: operates up to 16 single systems individually
- 16 channel: operates up to 16 groups of systems individually
- LCD display
- Touch button control
- Timing function with max. 8 timing points programmable for daily and weekly cycles

D. MANUALS

Refer to Silent Gliss website.


COMBINATION CONTROLS AND SYSTEMS

A. EXAMPLE



Applicable with following systems:

- Electric curtain track system SG 5100

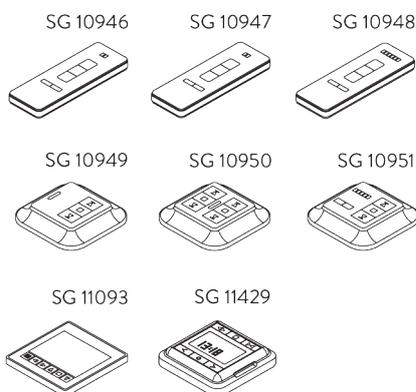

**B. WIRING
DIAGRAMS**



Refer to Silent Gliss website.

PARTS

A. CONTROLS



SG 10946

Radio hand held 1 channel



SG 10947

Radio hand held 2+1 channel



SG 10948

Radio hand held 6+1 channel



SG 10949

Radio wall transmitter 1 channel



SG 10950

Radio wall transmitter 2 channel



SG 10951


Radio wall transmitter 5+1 channel



SG 11429

Radio timer unit 1 channel

SG Control N



PRODUCT INFORMATION

- *Radio controlled*
- *Bi directional*
- *Radio hand held controls: 1-channel or 6-channel*
- *Radio wall controls, 1-channel or 6-channel*
- *Radio receivers for motors without integrated receiver*
- *Silent Gliss Move App*


APPLICATION

A. SYSTEMS

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Electric curtain track system SG 5800
- Panel Glide System SG 2750
- Roller blind system SG 4955
- Roller blind system SG 4960
- Roller blind system SG 4970
- Roller blind system SG 4980
- Roller blind system SG 4985
- Roman blind system SG 2355
- Roman blind system SG 2360
- Skylight shading system SG 2195
- Skylight shading system SG 8600
- Skylight shading system SG 8640
- Venetian blind system SG 8250
- Venetian blind system SG 8960
- Vertical blind system SG 2960

OVERVIEW COMPONENTS

A. RADIO CONTROLS




SG 11931

- **Channel:** 1 channel
- **Frequency:** 433 MHz
- **Colours:** white, black

Features:

- Operates single system or operates one group up to 5 systems
- Wall holder in corresponding colour




SG 11932

- **Channel:** 6 channel
- **Frequency:** 433 MHz
- **Colours:** white, black

Features:

- 6 channel: operates up to 6 single systems individually
- 6 channel: operates up to 6 groups of up to 5 systems individually
- Several channels can be operated simultaneously
- Saves the selection of channels
- Wall holder in corresponding colour

B. RADIO WALL CONTROLS




SG 11936

- **Channel:** 1 channel
- **Frequency:** 433 MHz
- **Colours:** white

Features:

- Operates single system or operates one group of up to 5 systems



SG 11937

- **Channel:** 6 channel
- **Frequency:** 433 MHz
- **Colours:** white

Features:

- 6 channel: operates up to 6 single systems individually
- 6 channel: operates up to 6 groups of up to 5 systems individually
- Several channels can be operated simultaneously
- Saves the selection of channels

C. MOVE BY SILENT GLISS




SG 11900

- **Frequency:** 433, 868 MHz
- **Colours:** black

Features:

- Operates up to 40 single systems individually
- App available for Android and IOS
- Various languages
- Programmable day and week, sunrise and sunset time
- Holiday mode
- Customised automation

D. RADIO RECEIVERS




SG 11938

- **Channel:** 1 channel
- **Frequency:** 433 MHz
- **Voltage:** 100-240 V / 50/60 Hz

Features:

- Operates single system
- Flush mounting




SG 11939

- **Channel:** 1 channel
- **Frequency:** 433 MHz

Features:

- Only applicable with motor SG 9060 (electric curtain track system SG 5600)

E. RELAY



SG 11946

- **Voltage:** 240 V / 50 Hz

Features:

- Potential separation



F. MANUALS

Refer to Silent Gliss website.

COMBINATION CONTROLS / RECEIVERS AND SYSTEMS

A. EXAMPLES


Motors with integrated receiver

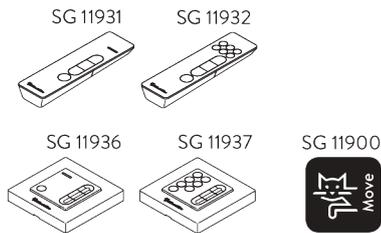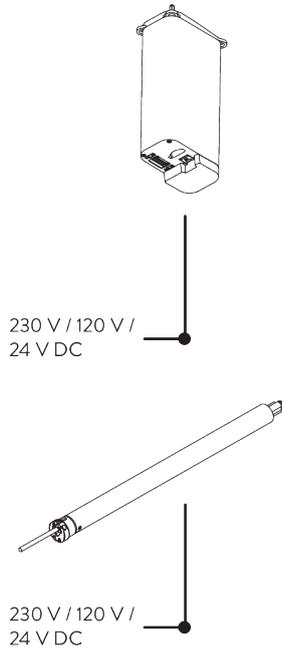

Applicable with following systems:

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Panel glide system SG 2750
- Roller blind system SG 4955
- Roller blind system SG 4960
- Roller blind system SG 4970
- Roller blind system SG 4980
- Roller blind system SG 4985
- Roman blind system SG 2355
- Roman blind system SG 2360
- Vertical blind system SG 2960
- Venetian blind system SG 8960 (230 V)


Motors without integrated receiver

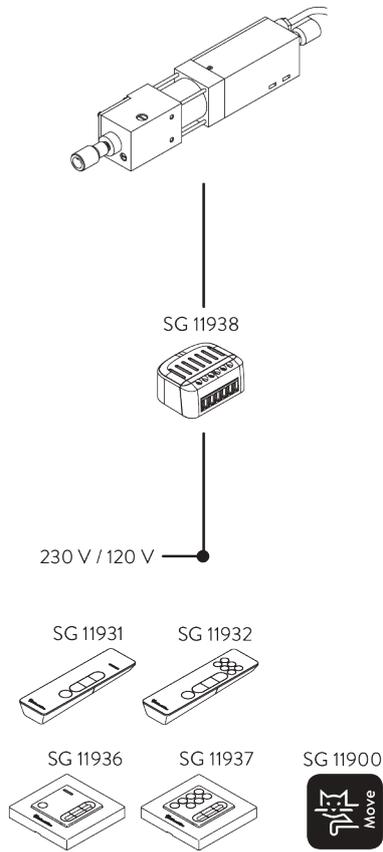

Applicable with following systems:

- Electric curtain track system SG 5800
- Skylight shading system SG 2195
- Skylight shading system SG 8600
- Skylight shading system SG 8640

24 V DC motors without integrated receiver

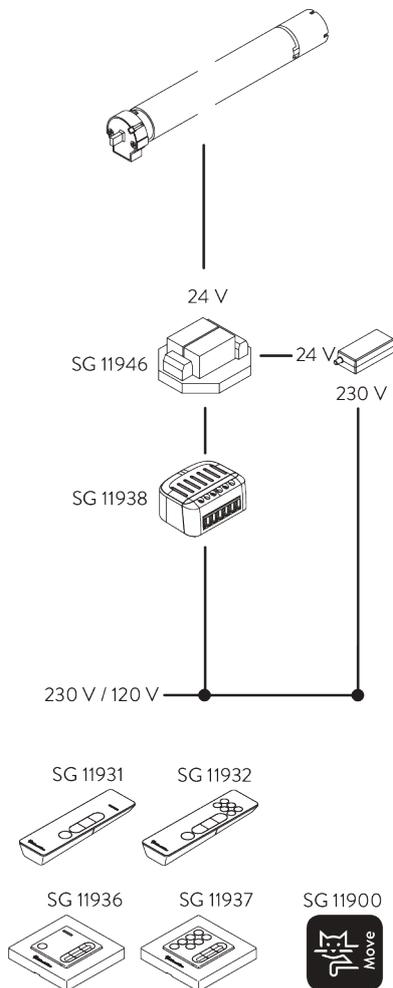

Applicable with following systems:

- Venetian blind system SG 8250

B. WIRING
DIAGRAMS



Refer to Silent Gliss website.

PARTS

A. CONTROLS / RECEIVERS



SG 11900

Move Server



SG 11931

Radio hand held 1 channel



SG 11932

Radio hand held 6 channel



SG 11936

Radio wall transmitter 1 channel




SG 11937

Radio wall transmitter 6 channel




SG 11938

Radio receiver BiDi Shutter



SG 11939



Radio modul control N



SG 11946

Relay

SG Control R

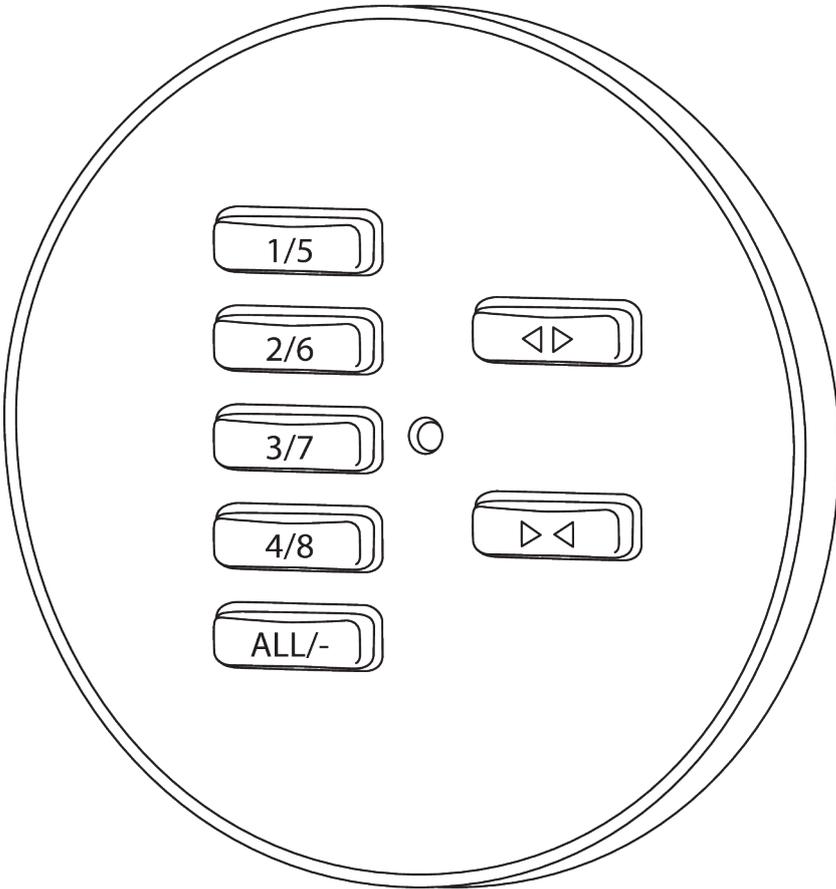

PRODUCT INFORMATION

- Radio controlled
- Single-channel and 8-channel radio controls
- Radio hand-held and wall mounted controls
- Radio receivers for motors without integrated receiver
- Wall switch finishes – mirror polish steel, stainless steel, brass


APPLICATION

A. SYSTEMS

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Electric curtain track system SG 5800
- Pleated blind system SG 8500
- Roller blinds system SG 4960
- Roller blinds system SG 4970
- Roller blinds system SG 4880
- Roman blind system SG 2350
- Skylight shading system SG 2195
- Skylight shading system SG 8640
- Skylight shading system SG 8600
- Venetian blind system SG 8250
- Venetian blind system SG 8960
- Vertical blind system SG 2950

OVERVIEW COMPONENTS

A. RADIO WALL CONTROLS




SG 20913

- **Channel:** 1 channel
- **Frequency:** 433.9 MHz
- **Colours:** Mirror polish steel, brushed stainless steel, brass

Features:

- Operates single system or one group of systems
- Requires installation into an existing recessed back box (min. depth 16 mm)




SG 20914

- **Channel:** 8 channel
- **Frequency:** 433.9 MHz
- **Colours:** Mirror polish, brushed stainless, brass

Features:

- 8 channel: operates up to 8 systems individually
- 8 channel: operates up to 8 groups of systems individually
- 1 channel operates all systems together
- Requires installation into an existing recessed back box (min. depth 16 mm)

B. RADIO CONTROLS




SG 20336

- **Channel:** 8 channel
- **Frequency:** 433.9 MHz
- **Colours:** Mirror polish steel, Brushed stainless steel, brass

Features:

- 8 channel: operates up to 8 systems individually
- 8 channel: operates up to 8 groups of systems individually
- 1 channel operates all systems together

C. RADIO RECEIVERS




SG 20907

- **Channel:** 1 channel
- **Frequency:** 433.9 MHz
- **Voltage Input:** 24 V
- **Volt output :** 24 V

Features:

- Operates 24V single system
- For motors without integrated receiver



SG 20919

- **Channel:** 1 channel
- **Frequency:** 433.9 MHz
- **Voltage input:** 230 V
- **Voltage output:** 230V

Features:

- Operates 230 V single system
- For motors without integrated receiver


D. MANUALS

Refer to Silent Gliss website.

COMBINATION CONTROLS / RECEIVERS AND SYSTEMS

A. EXAMPLES


Motors with integrated receiver

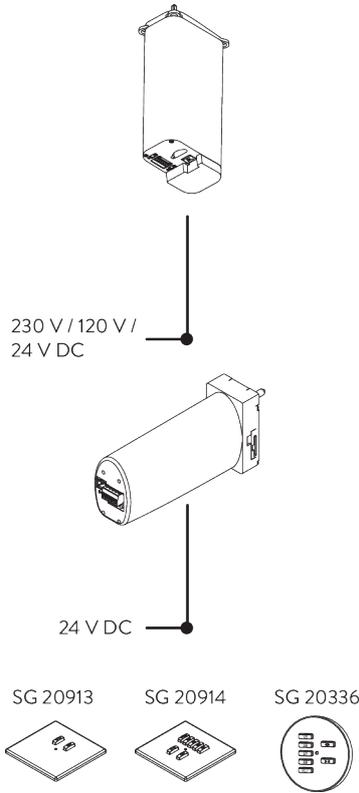

Applicable with the following systems:


- Electric curtain track system SG 5600
- Vertical blind system SG 2950

Motors without integrated receiver

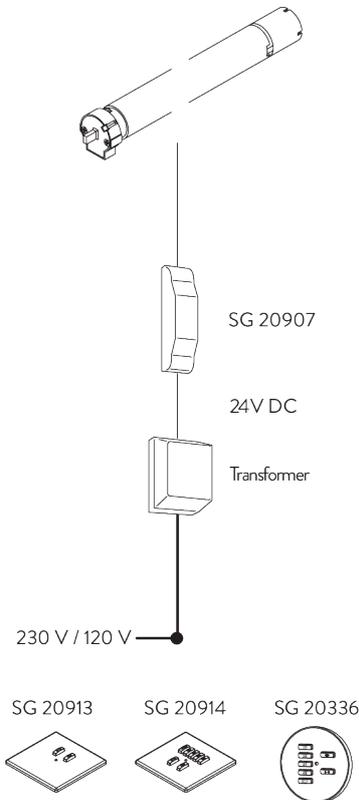

Applicable with the following systems:

- Pleated blind system SG 8500
- Venetian blind system SG 8250

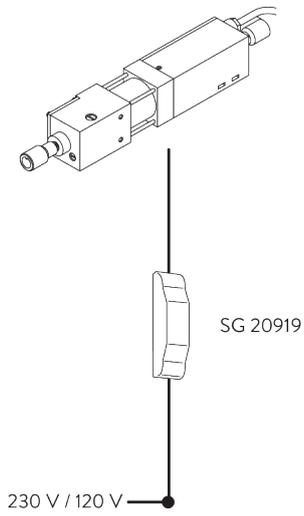

Applicable with the following systems:

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5800
- Roller blinds system SG 4960
- Roller blinds system SG 4970
- Roller blinds system SG 4880
- Roman blind system SG 2350
- Skylight shading system SG 2195
- Skylight shading system SG 8640
- Skylight shading system SG 8600


**B. WIRING
DIAGRAMS**



Refer to Silent Gliss website.

PARTS

A. CONTROLS / RECEIVERS




SG 11411

Radio module type R



SG 20336

Hand held transmitter 8 channel



SG 20907

Control module motor type R




SG 20913

Wall switch single channel



SG 20914

Wall switch 8 channel



SG 20917


Pattress box



SG 20919

Control module motor type R

SG Smart

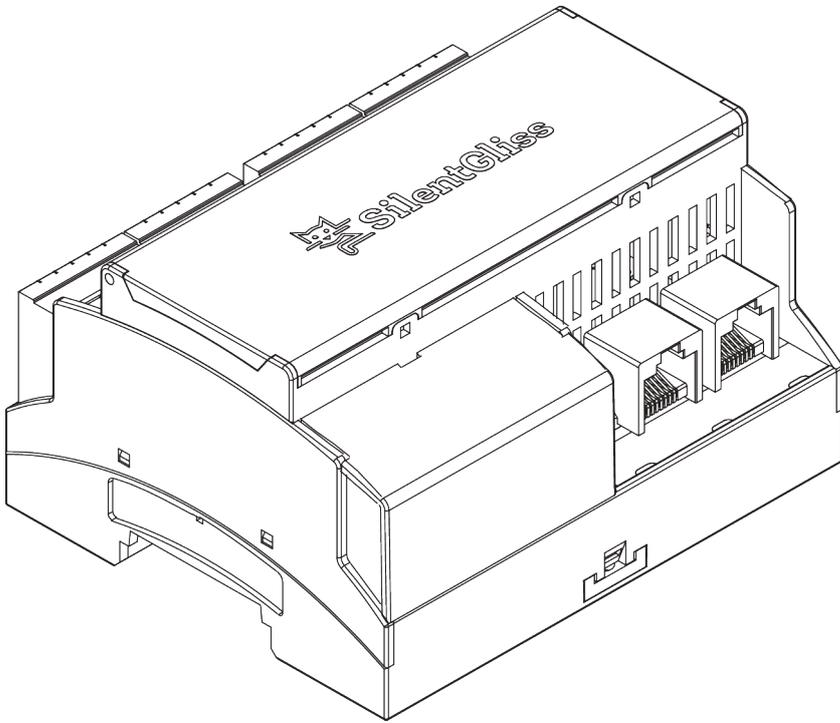

PRODUCT INFORMATION

- *Two way communication between motors and control system*
- *Works in conjunction with specific third party control systems*
- *Precise motor control*
- *Wide range of Silent Gliss product types*


APPLICATION

A. SYSTEMS

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Roller blind system SG 4960
- Roller blind system SG 4970
- Roller blind system SG 4880
- Roman blind system SG 2350
-
- Panel glide system SG 2750

OVERVIEW COMPONENTS

A. SMART COMPONENTS




SG 11260 Gateway Cedia

- Din rail mounted

Features:

- Controls up to 8 motors
- Up to 64 motors when combined with Expansion Units SG 11262
- Key communication link with primary control system
- Plug in connector blocks




SG 11261 Gateway KNX

- Din rail mounted

Features:

- For use with KNX based control systems
- Key communication link with primary control systems
- Controls up to 8 motors
- Up to 64 motors when combined with expansion units SG 11262
- Plug in connector blocks




SG 11262 Expansion Unit

- Din Rail mounted
- Used in conjunction with Gateways

Features:

- Controls up to 8 motors
- Plug in connector blocks




SG 11270 Smart Module

- Smart Module for SG 5600 system
- Works exclusively with Smart Gateway components

Features:

- Simple "plug in" module for SG 9060 motors
- Screw connector blocks

B. POWER SUPPLIES




SG 11263 Power Supply

- 24 V DC 2.5 A output
- Din rail mounted

Features:

- Powers Gateway components SG 11260 / SG 11261
- Variable input voltage
- Output range 21.6 - 29 V DC




SG 11264 Power Supply

- 24 V DC 3.8 A output
- Din Rail mounted

Features:

- Variable input voltage
- Output range 21.6 - 29 V DC




SG 11265 Power Supply

- 24 V DC 5 A output
- Din rail mounted

Features:

- Variable input voltage
- Output range 24 - 28 V DC




SG 11266 Power Supply

- 24 V DC 10 A output
- Din rail mounted

Features:

- Variable input voltage
- Output range 24 - 28 V DC

C. CABINETS




SG 11281 Cabinet

– 8 system cabinet

Features:

- Takes up to 8 smart product systems
- Steel construction
- Wall mounted
- Size 520 mm W x 510 mm L x 196.5 mm D
- Complete with 100 A mains power breaker




SG 11282 Cabinet

– 24 system cabinet

Features:

- Takes up to 24 smart product systems
- Steel construction
- Size 520 mm W x 890 mm L x 196.5 mm D
- Complete with 100 A mains power breaker



SG 11283 Cabinet

– 56 system cabinet

Features:

- Takes up to 56 smart product systems
- Steel construction
- Size 520 mm W x 1250 mm L x 196.5 mm D
- Complete with 100 A mains power breaker


D. MANUALS

Refer to Silent Gliss website.

COMBINATION CONTROLS AND SYSTEMS

A. EXAMPLE

Schematic Smart system arrangement

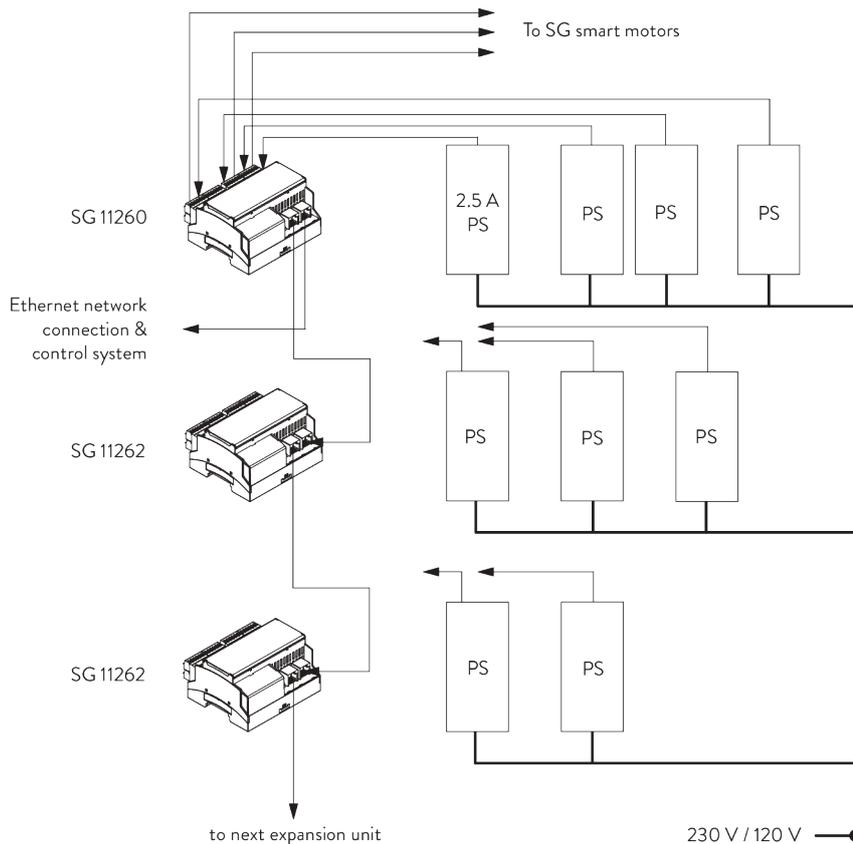

B. WIRING DIAGRAMS



Refer to Silent Gliss website.

PARTS

A. CONTROLS



SG 11250

Motor 24V DC, 50-Series 1.5/55



SG 11251

Motor 24V DC, 50-Series 3/32




SG 11252

Motor 24V DC, 50-Series 6/20




SG 11255

Motor 24V DC, 50-Series 10/20




SG 11260

Gateway Cedia




SG 11261

Gateway KNX




SG 11262

Expansion unit




SG 11263

Power supply 24V DC, 2.5A DIN Rail




SG 11264

Power supply 24V DC, 3.8A DIN Rail




SG 11265

Power supply 24V DC, 5A DIN Rail



SG 11266

Power supply 24V DC, 10A DIN Rail




SG 11270

Smart module




SG 11281

Cabinet for 8 systems



SG 11282

Cabinet for 24 systems



SG 11283

Cabinet for 56 systems



SG 11325

Smart plug 6-pin, MC 1.5/6 ST-3.81

The Architects of Silence

Silent Gliss is the leading global supplier of premium interior window treatments. Since 1952 we have been tirelessly committed to the development of the world's smoothest, quietest systems using state of the art technology.

Driven by customer needs, Silent Gliss offers functional and durable products. Expert technical advice coupled with installation and support services complete the offer. Silent Gliss stands for innovative, sustainable, tailor made solutions, exceptional design and first-class quality.

Silent Gliss Ltd.

Pyramid Business Park
Poorhole Lane, Broadstairs
Kent CT10 2PT
United Kingdom
T +44 1843 863571
F +44 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd.

Pyramid Business Park
Poorhole Lane, Broadstairs
Kent CT10 2PT
United Kingdom
T +44 1843 874250
F +44 1843 864503
info@silentglissglobal.com

Silent Gliss Blinds Trading LLC

Office 1906
The H Hotel Complex
Trade Center First
Dubai
United Arab Emirates
T +971 4 7050318
info@silentgliss.ae

silentgliss.co.uk

silentglissglobal.com

silentgliss.ae