PANEL GLIDE SYSTEMS

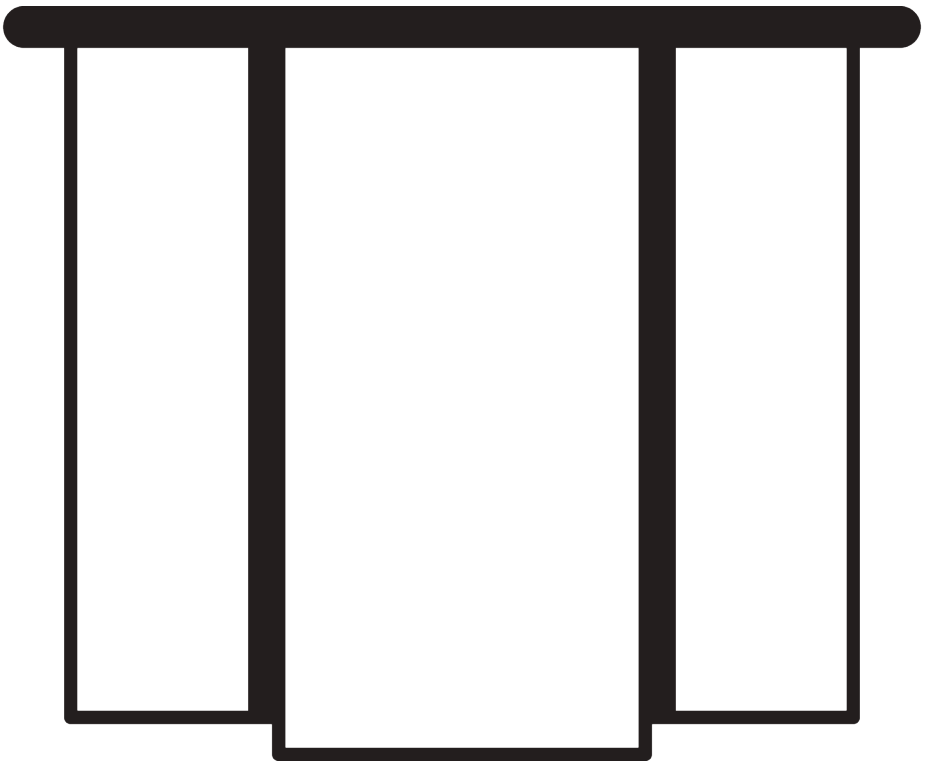

06/2025/V3

SilentGliss

GENERAL NOTES

Dimensions

- *Measurements are in mm except where indicated.*
- *Max. kg relates to fabric incl. accessories.*
- *Stack size depends on panel width.*
- *Recommended distance floor / fabric: 20 mm.*
- *In order to determine system height (B), the smallest room height must be taken into account.*

Fitting

- *Installation by qualified fitter only.*
- *Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.*
- *Qualified fitter must use appropriate screws / fixings for each situation.*
- *Profile lip if applicable to be installed to room side.*
- *Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.*
- *Check space for cables and plugs!*

Child Safety

- *All relevant Silent Gliss systems correspond to child safety EN 13120.*
- *All parties involved must comply with EN 13120.*

APPLICATION CHART

PAGE	SYSTEM	OPERATION	DIMENSION	← max. →	↑ max. ↓	kg max.
5	**SG 2700**		S - L		4 m	2 kg
15	**SG 2710**		S - L	6 m	4 m	2 kg
23	**SG 2730**		S - L		3 m	2 kg
31	**SG 2750**		S - L	6 m	4 m	2 kg

SG 2700

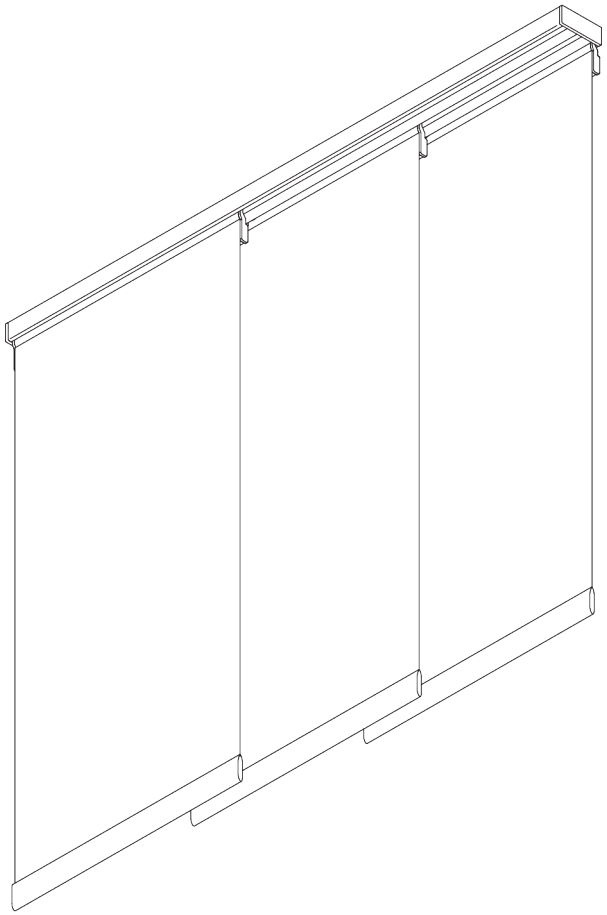

PRODUCT INFORMATION

- ***Operation:*** *hand*
- ***Range:*** *S - L*
- ***Fitting:*** *ceiling, wall, recess*
- ***Colours:*** *white RAL 9016; special colours or anodised aluminum possible*
- ***Fabrics:*** *refer to Silent Gliss fabric collection*

Features:

- *2-component (2C) roller technology*
- *Silent and smooth running*
- *Detachable fabric panels*
- *Aluminium carriers*
- *Free floating or connected panels*

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS

Panels free floating: unlimited
Panels connected: 6 m



4 m

Max. 2 kg per m

B. PROFILE

Profile information



SG 10122
Profile 2-channel



SG 10123
Profile 3-channel



SG 10124
Profile 4-channel



SG 10125
Profile 5-channel



SG 10172
Recess profile 2-channel



SG 10173
Recess profile 3-channel



SG 10174
Recess profile 4-channel



SG 10175
Recess profile 5-channel



SG 2006
Bottom bar 28x3 mm



SG 10230
Carrier alu

C. HOW TO MEASURE

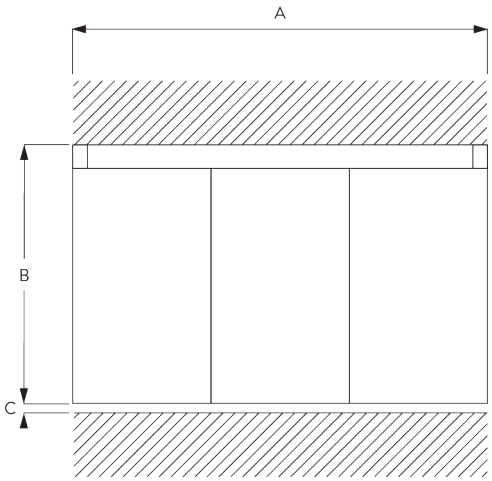

A: System width
B: System height
C: Distance between floor and fabric

Dimensions of Panels

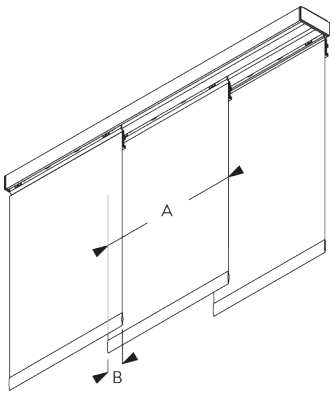

Free floating:
A: Recommended panel width: 500 - 1200

Connected:
A: Recommended panel width: 500 - 1200
B: Overlap: min. 50

D. SPECIFICATION TEXT

Silent Gliss SG 2700 Hand Operated Panel Glide System. *Supplied made to measure and complete comprising profiles SG 10122 / SG 10123 / SG 10124 / SG 10125 as necessary with carriers SG 10230 with associated components and bottom weight SG 2006. Fabric panels stack right hand single / left hand single / pair / centre. Hand operated with panels unconnected / connected using draw rod SG 10430 / SG 10431 / SG 10432 / SG 10433 / SG 10434. Ceiling fixed using clamps SG 3003 / SG 3004 or brackets SG 10136 / SG 10137. Wall fix with Smart Fix brackets SG 11200-11204 / Square Smart Fix brackets SG 11210-11214 / Universal Smart Fix brackets SG 11154 -11156 with either SG 10136 or SG 10137 brackets. Recess fixed option with recess profile SG 10172 / SG 10173 / SG 10174 / SG 10175. Fabric to be chosen from Silent Gliss fabric collection, Price Group 1 / 2 / 3 / 4.*

FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.

Fixing points



B. CEILING FITTING

Clamp SG 3003 / SG 3004

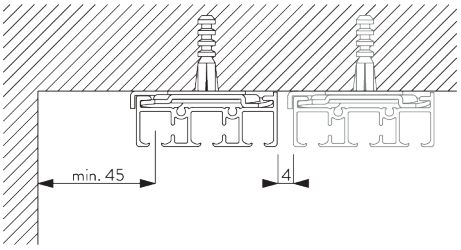



SG 3003
Clamp

SG 3004
Clamp

Clamp	*SG 10122*	*SG 10123*	*SG 10124*	*SG 10125*
SG 3004	*X*			
SG 3003		*X*	*X*	*X*

Bracket SG 10136 / SG 10137

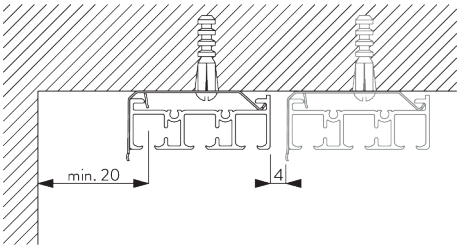



SG 10136
Bracket



SG 10137
Bracket

Bracket	*SG 10122*	*SG 10123*	*SG 10124*	*SG 10125*
SG 10136	*X*			
SG 10137		*X*	*X*	*X*

C. WALL FITTING

Smart Fix

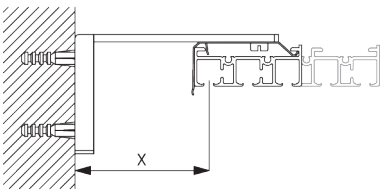

Smart Fix SG 11200 - SG 11204:
Bracket SG 10136 for 2 channel profile.
Bracket SG 10137 for more than 2 channel profiles.
Screw SG 10395 (M4x6) needed.

Smart Fix	*X mm (SG 10122)*	*X mm (SG 10123)*	*X mm (SG 10124)*	*X mm (SG 10125)*
SG 11200 / SG 11210	*43*	*24*	*24*	*24*
SG 11201 / SG 11211	*63*	*44*	*44*	*44*
SG 11202 / SG 11212	*83*	*64*	*64*	*64*
SG 11203 / SG 11213	*103*	*84*	*84*	*84*
SG 11204 / SG 11214	*133*	*114*	*114*	*114*
SG 11154	*93-121*	*74-102*	*74-102*	*74-102*
SG 11155	*123-151*	*104-132*	*104-132*	*104-132*
SG 11156	*172-201*	*154-182*	*154-182*	*154-182*

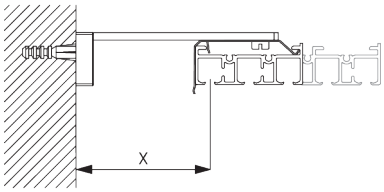

Square Smart Fix SG 11210 - SG 11214:
Bracket SG 10136 for 2 channel profile.
Bracket SG 10137 for more than 2 channel profiles.
Screw SG 10395 (M4x6) needed.

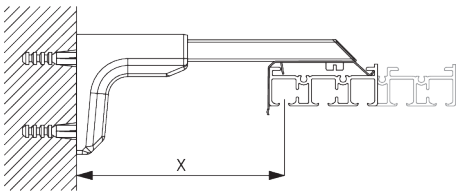

Universal Smart Fix SG 11154 - SG 11156:
Bracket SG 10136 for 2 channel profile.
Bracket SG 10137 for more than 2 channel profiles.
Screw SG 10492 (M4x8) needed.



SG 10136
Bracket



SG 10137
Bracket

SG 10395
Pan head screw M4x6

SG 10492
Pan head screw M4x8



SG 11200
Smart Fix 60 mm



SG 11201
Smart Fix 80 mm



SG 11202
Smart Fix 100 mm



SG 11203
Smart Fix 120 mm



SG 11204
Smart Fix 150 mm



SG 11210
Square Smart Fix 60 mm



SG 11211
Square Smart Fix 80 mm



SG 11212
Square Smart Fix 100 mm



SG 11213
Square Smart Fix 120 mm



SG 11214
Square Smart Fix 150 mm



SG 11154
Universal Smart Fix 120 mm



SG 11155
Universal Smart Fix 150 mm



SG 11156
Universal Smart Fix 200 mm

D. RECESS FITTING

Recess profiles
SG 10172 - SG 10175



One wedge SG 10157 per fixing point.
For detailed recess fitting, visit the Silent Gliss website.



SG 10157
Wedge



SG 10172
Recess profile 2-channel



SG 10173
Recess profile 3-channel



SG 10174
Recess profile 4-channel



SG 10175
Recess profile 5-channel

SYSTEM OPTIONS

A. OPERATION

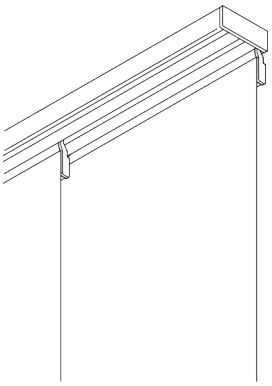

Free floating (unconnected panels)

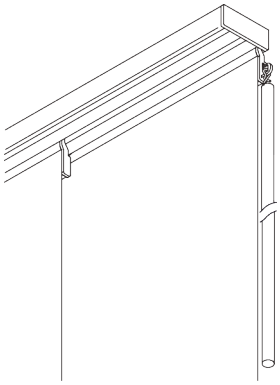

Connected panels (draw rod optional)

B. PANEL STACKING (CONNECTED)

Single stack
Note: dot = fixed panel

Pair stack
Note: dot = fixed panel

Other variations are possible.

PARTS

A. STANDARD PARTS



SG 2006
Bottom bar 28x3 mm

SG 2539
Tape



SG 3003
Clamp

SG 10123
Profile 3-channel



SG 10143
Cover

SG 10159
Countersunk head screw 3.5x13



SG 10200
2C roller

SG 10230
Carrier alu

SG 10252
End cover left

SG 10253
End cover right



SG 10432
Draw rod 100 cm

B. OPTIONAL PARTS

SG 3004
Clamp



SG 3008
Connection bridge



SG 6024
Connection bridge



SG 10074
Countersunk head screw M4x8

SG 10122
Profile 2-channel



SG 10124
Profile 4-channel

SG 10125
Profile 5-channel

SG 10136
Bracket



SG 10137
Bracket



SG 10140
Angle



SG 10142
End cover



SG 10144
End cover



SG 10145
End cover



SG 10146
Angle



SG 10148
Eyelet for draw rod



SG 10156
End stop



SG 10157
Wedge



SG 10158
Click glider



SG 10172
Recess profile 2-channel

SG 10173
Recess profile 3-channel

SG 10174
Recess profile 4-channel

SG 10175
Recess profile 5-channel



SG 10340
Eyelet for draw rod

SG 10395
Pan head screw M4x6



SG 10430
Draw rod 50 cm



SG 10431
Draw rod 75 cm



SG 10433
Draw rod 125 cm



SG 10434
Draw rod 150 cm



SG 10492

Pan head screw M4x8



SG 11154

Universal Smart Fix 120 mm



SG 11155

Universal Smart Fix 150 mm



SG 11156

Universal Smart Fix 200 mm



SG 11200

Smart Fix 60 mm



SG 11201

Smart Fix 80 mm



SG 11202

Smart Fix 100 mm



SG 11203

Smart Fix 120 mm



SG 11204

Smart Fix 150 mm



SG 11210

Square Smart Fix 60 mm



SG 11211

Square Smart Fix 80 mm



SG 11212

Square Smart Fix 100 mm



SG 11213

Square Smart Fix 120 mm



SG 11214

Square Smart Fix 150 mm

SG 2710

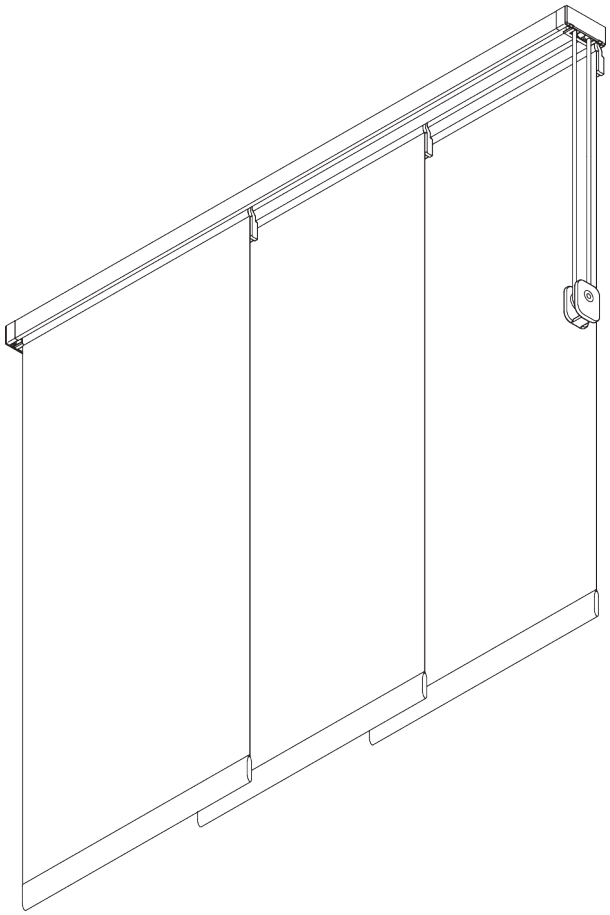

PRODUCT INFORMATION

- ***Operation:*** *cord*
- ***Range:*** *S - L*
- ***Fitting:*** *ceiling, wall, recess*
- ***Colours:*** *white RAL 9016; special colours or anodised aluminum possible*
- ***Fabrics:*** *refer to Silent Gliss fabric collection*

Features:

- *2-component (2C) roller technology*
- *Silent and smooth running*
- *Detachable fabric panels*
- *Aluminium carriers*

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS

6 m



4 m

max. 2 kg per m

B. PROFILE

Profile information



SG 10123
Profile 3-channel



SG 10124
Profile 4-channel



SG 10125
Profile 5-channel



SG 10173
Recess profile 3-channel



SG 10174
Recess profile 4-channel



SG 10175
Recess profile 5-channel



SG 2006
Bottom bar 28x3 mm



SG 10230
Carrier alu

C. HOW TO MEASURE

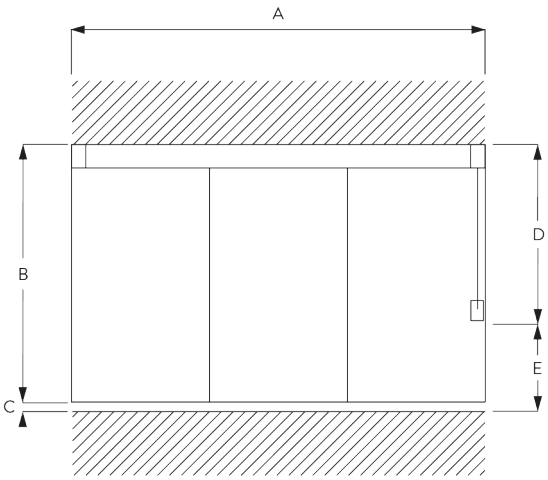

A: System width
B: System height
C: Distance between floor and fabric
D: Cord height
E: Safety Retainer SG 10731 min. 150 cm above floor

Dimensions of Panels

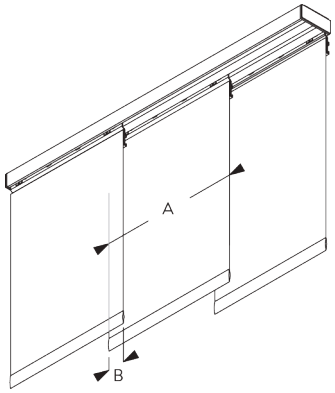

A: Recommended panel width: 500 - 1200
B: Overlap: min. 50

D. SPECIFICATION TEXT

Silent Gliss SG 2710 Cord Operated Panel Glide System. *Supplied made to measure and complete comprising profiles SG 10123 / SG 10124 / SG 10125 as necessary with carriers SG 10230 with associated components and bottom weight SG 2006. Fabric panels stack right hand single / left hand single / pair / centre. Cord operated. Ceiling fixed using clamps SG 3003 / SG 3004 or brackets SG 10136 / SG 10137. Wall fix with Smart Fix brackets SG 11200-11204 / Square Smart Fix brackets SG 11210-11214 / Universal Smart Fix brackets SG 11154 -11156 with SG 10137 brackets. Recess fixed option with recess profile SG 10173 / SG 10174 / SG 10175. Compliant to Child Safety legislation EN 13120 when used in conjunction with Cord Retainer SG 10400. Fabric to be chosen from Silent Gliss fabric collection, Price Group 1 / 2 / 3 / 4.*

FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.

Fixing points



B. CEILING FITTING

Clamp SG 3003

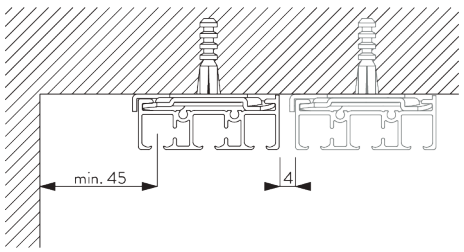



SG 3003
Clamp

Bracket SG 10137

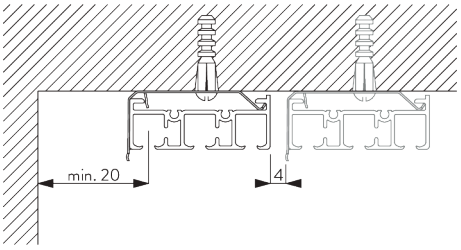



SG 10137
Bracket

Bracket	*SG 10123*	*SG 10124*
SG 10137	*X*	*X*

C. WALL FITTING

Smart Fix

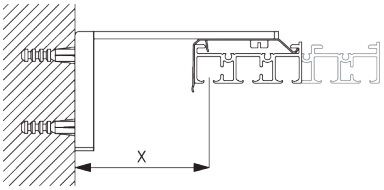

Smart Fix SG 11200 - SG 11204:
Screw SG 10395 (M4x6) needed.

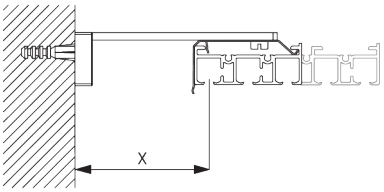

Square Smart Fix SG 11210 - SG 11214:
Screw SG 10395 (M4x6) needed.

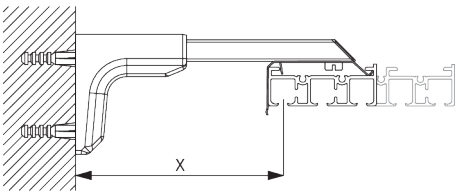

Universal Smart Fix 11154 - SG 11156:
Screw SG 10492 (M4x8) needed.

Smart Fix	*X mm (SG 10123)*	*X mm (SG 10124)*	*X mm (SG 10125)*
SG 11200 / SG 11210	*24*	*24*	*24*
SG 11201 / SG 11211	*44*	*44*	*44*
SG 11202 / SG 11212	*64*	*64*	*64*
SG 11203 / SG 11213	*84*	*84*	*84*
SG 11204 / SG 11214	*114*	*114*	*114*
SG 11154	*74-102*	*74-102*	*74-102*
SG 11155	*104-132*	*104-132*	*104-132*
SG 11156	*154-182*	*154-182*	*154-182*



SG 10137
Bracket

SG 10395
Pan head screw M4x6

SG 10492
Pan head screw M4x8



SG 11200
Smart Fix 60 mm



SG 11201
Smart Fix 80 mm



SG 11202
Smart Fix 100 mm



SG 11203
Smart Fix 120 mm



SG 11204
Smart Fix 150 mm



SG 11210
Square Smart Fix 60 mm



SG 11211
Square Smart Fix 80 mm



SG 11212
Square Smart Fix 100 mm



SG 11213
Square Smart Fix 120 mm



SG 11214
Square Smart Fix 150 mm



SG 11154
Universal Smart Fix 120 mm



SG 11155
Universal Smart Fix 150 mm



SG 11156
Universal Smart Fix 200 mm

D. RECESS FITTING

Recess profiles SG 10173 - SG 10175



One wedge SG 10157 per fixing point.
For detailed recess fitting, visit the Silent Gliss website.



SG 10157
Wedge



SG 10173
Recess profile 3-channel



SG 10174
Recess profile 4-channel



SG 10175
Recess profile 5-channel

SYSTEM OPTIONS

A. PANEL STACKING

Single stack
Note: dot = fixed panel

Pair stack
Note: dot = fixed panel

Other variations are possible.

PARTS

A. STANDARD PARTS



SG 2006

Bottom bar 28x3 mm

SG 2539

Tape



SG 3003

Clamp

SG 3090

Cord ø 3.5 mm

SG 10123

Profile 3-channel



SG 10140

Angle



SG 10146

Angle



SG 10150

Pilot runner

SG 10153

Cord guide



SG 10156

End stop

SG 10159

Countersunk head screw 3.5x13



SG 10200

2C roller

SG 10230

Carrier alu

SG 10252

End cover left



SG 10253

End cover right



SG 10731

Child safety retainer set

B. OPTIONAL PARTS



SG 6024

Connection bridge



SG 10074

Countersunk head screw M4x8

SG 10124

Profile 4-channel

SG 10125

Profile 5-channel



SG 10137

Bracket



SG 10154

Cord guide



SG 10155

Cord guide



SG 10157

Wedge

SG 10173

Recess profile 3-channel

SG 10174

Recess profile 4-channel

SG 10175

Recess profile 5-channel



SG 10395

Pan head screw M4x6



SG 10492

Pan head screw M4x8



SG 11154

Universal Smart Fix 120 mm



SG 11155

Universal Smart Fix 150 mm



SG 11156

Universal Smart Fix 200 mm



SG 11200

Smart Fix 60 mm



SG 11201

Smart Fix 80 mm



SG 11202

Smart Fix 100 mm



SG 11203

Smart Fix 120 mm



SG 11204

Smart Fix 150 mm



SG 11210

Square Smart Fix 60 mm



SG 11211

Square Smart Fix 80 mm



SG 11212

Square Smart Fix 100 mm



SG 11213

Square Smart Fix 120 mm



SG 11214

Square Smart Fix 150 mm

SG 2730



FLEX

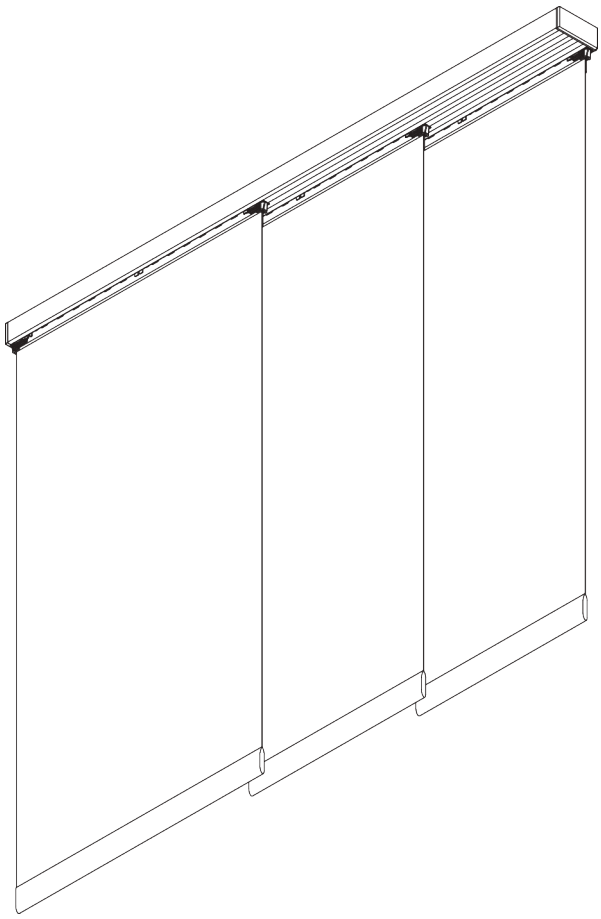

PRODUCT INFORMATION

- ***Operation:*** *hand*
- ***Range:*** *S - L*
- ***Fitting:*** *ceiling, wall*
- ***Colours:*** *white RAL 9016, anodised aluminum*
- ***Fabrics:*** *refer to Silent Gliss fabric collection*

Features:

- *2-component (2C) roller technology*
- *Silent and smooth running*
- *Free floating or connected panels*
- *Bendable*

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS

Panels free floating: unlimited
Panels connected: 6 m



3 m

Max. 2 kg per m

B. PROFILE

Profile and bending information



SG 10132
Profile 2-channel
Radius:
15 cm, >25 cm



SG 10133
Profile 3-channel
Radius:
15 cm, >25 cm



SG 10134
Profile 4-channel
Radius:
15 cm, >25 cm



SG 10135
Profile 5-channel
Radius:
15 cm, >25 cm



SG 10179
Profile



SG 10180
Carrier flexible

C. HOW TO MEASURE

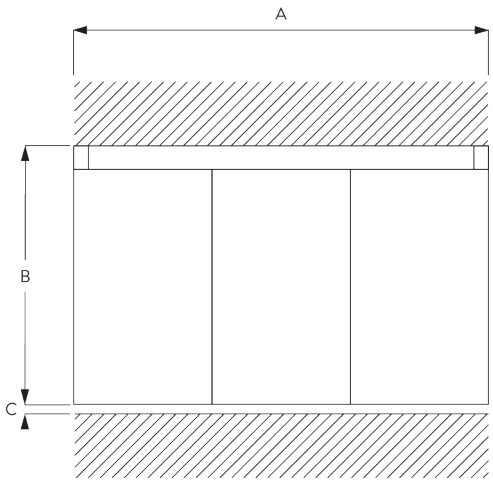

A: System width
B: System height
C: Distance between floor and fabric

Dimensions of Panels



Free floating:
A: Recommended panel width: 500 - 1200

Connected:
A: Recommended panel width: 500 - 1200
B: Overlap: min. 50

D. SPECIFICATION TEXT

Silent Gliss SG 2730 Flex Panel Glide System. *Curved panel glide system supplied made to measure and complete comprising profiles SG 10132 / SG 10133 / SG 10134 / SSG 10135 as necessary with carrier SG 10180 with associated components and flexible lead bottom weight SG 10233. Fabric panels stack right hand single / left hand single / pair / centre. Hand operated with panels unconnected / connected using draw rod SG 10430 / SG 10431 / SG 10432 / SG 10433 / SG 10434. Ceiling fix direct with suitable screw. Wall fix with Smart Fix brackets SG 11206-11208 / Square Smart Fix brackets SG 11216 – 11218 with slot nut SG 10160. Fabric to be chosen from Silent Gliss fabric collection, Price Group 1 / 2 / 3.*

FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.

Fixing points



B. CEILING FITTING

Direct fitting

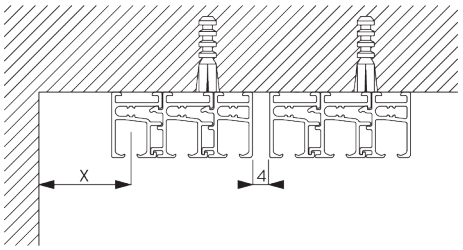

X = depending on room conditions

C. WALL FITTING

Smart Fix



Smart Fix with slot SG 11206 - SG 11208:
Screw SG 10395 (M4x6) needed.



Square Smart Fix with slot SG 11216 - SG 11218:
Screw SG 10395 (M4x6) needed.

Smart Fix	*X mm (SG 10132)*	*X mm (SG 10133)*	*X mm (SG 10134)*	*X mm (SG 10135)*
SG 11206 / SG 11216	*50*	*32*	*-*	*-*
SG 11207 / SG 11217	*70*	*52*	*34*	*-*
SG 11208 / SG 11218	*90*	*72*	*44*	*on request*



SG 10160
Slot nut

SG 10395
Pan head screw M4x6



SG 11206
Smart Fix with slot 60 mm



SG 11207
Smart Fix with slot 80 mm



SG 11208
Smart Fix with slot 100 mm



SG 11216
Square Smart Fix with slot 60 mm



SG 11217
Square Smart Fix with slot 80 mm



SG 11218
Square Smart Fix with slot 100 mm

SYSTEM OPTIONS

A. OPERATION

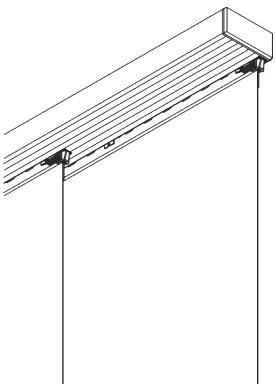

Free floating (unconnected panels)

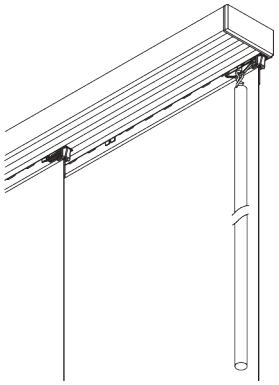

Connected panels (draw rod optional)

B. PANEL STACKING (CONNECTED)

Single stack

Note: dot = fixed panel

Pair stack

Other variations are possible. Same splitting for curved profiles.

Note: dot = fixed panel

PARTS

A. STANDARD PARTS



SG 10133
Profile 3-channel

SG 10159
Countersunk head screw 3.5x13

SG 10163
End cover



SG 10167
Clip left

SG 10168
Clip right

SG 10179
Profile

SG 10180
Carrier flexible



SG 10200
2C roller



SG 10233
Lead weight 100 gr/m



SG 10234
Fabric weight glass



SG 10237
Clip holder

SG 10248
Screw Pozi 4.5x70 mm SPAX

B. OPTIONAL PARTS



SG 10076
Fabric weight



SG 10132
Profile 2-channel



SG 10134
Profile 4-channel

SG 10135
Profile 5-channel



SG 10156
End stop



SG 10160
Slot nut

SG 10162
End cover

SG 10164
End cover

SG 10165
End cover



SG 10177
Connection bridge



SG 10196
Eyelet for draw rod

SG 10235
Sticker for screw head



SG 10239
Angle left



SG 10241
Angle right

SG 10243
Angle

SG 10244
Slider

SG 10281
Hexagon socket head cap screw M4x6

SG 10395
Pan head screw M4x6



SG 10430
Draw rod 50 cm



SG 10431
Draw rod 75 cm



SG 10432
Draw rod 100 cm



SG 10433
Draw rod 125 cm



SG 10434
Draw rod 150 cm



SG 11206
Smart Fix with slot 60 mm



SG 11207
Smart Fix with slot 80 mm



SG 11208
Smart Fix with slot 100 mm



SG 11216
Square Smart Fix with slot 60 mm



SG 11217
Square Smart Fix with slot 80 mm



SG 11218

Square Smart Fix with slot 100 mm

SG 2750

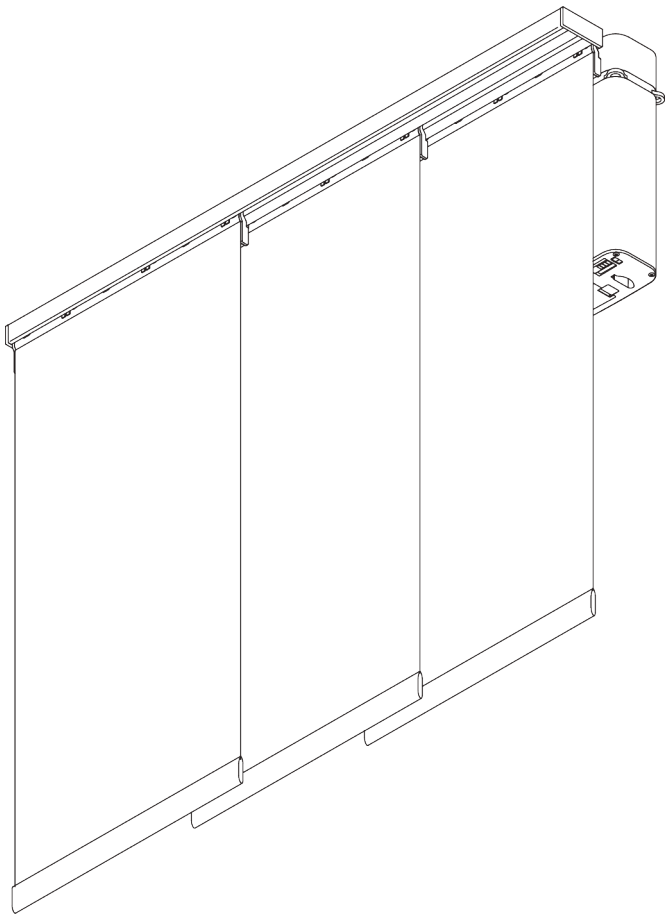

PRODUCT INFORMATION

- ***Operation:*** *motorised*
- ***Range:*** *S - L*
- ***Fitting:*** *ceiling*
- ***Colours:*** *white RAL 9016; special colours or anodised aluminum possible*
- ***Fabrics:*** *refer to Silent Gliss fabric collection*

Features:

- *2-component (2C) roller technology*
- *Silent and smooth running*
- *Aluminium carriers*
- *Applicable with electric curtain track system SG 5600*

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS

6 m



4 m

max. 2 kg per m

B. PROFILE

Profile information



SG 10123
Profile 3-channel



SG 10124
Profile 4-channel



SG 10125
Profile 5-channel



SG 2006
Bottom bar 28x3 mm



SG 10230
Carrier alu

C. HOW TO MEASURE

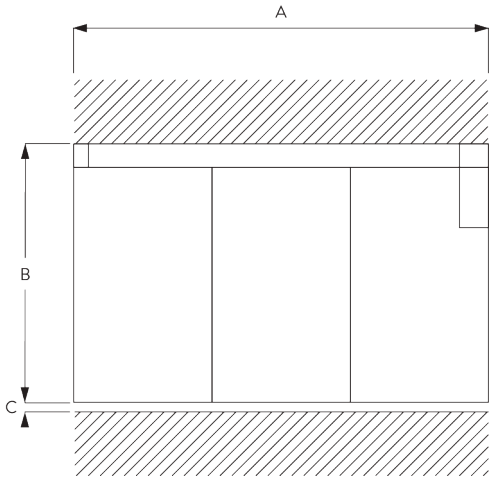

A: System width
B: System height
C: Distance between floor and fabric

Dimensions of Panels

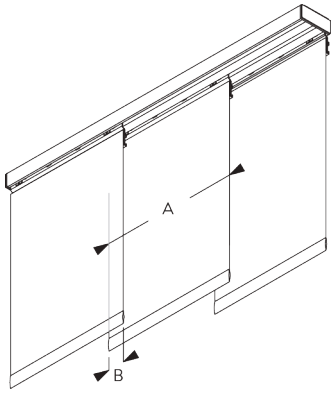

A: Recommended panel width: 500 - 1200
B: Overlap: min. 50

D. SPECIFICATION TEXT

Silent Gliss SG 2750 Electrically Operated Panel Glide System. *Supplied made to measure and complete comprising profiles SG 10123 / SG 10124 / SG 10125 as necessary with carriers SG 10230 with associated components and bottom weight SG 2006. Fabric panels stack right hand single / left hand single / pair / centre. Electrically operated (incorporating electric curtain track system SG 5600). Ceiling fixed using clamps SG 3003 / SG 3004. Fabric to be chosen from Silent Gliss fabric collection, Price Group 1 / 2 / 3 / 4.*

FITTING

A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.

Fixing points



B. CEILING FITTING

With SG 5600

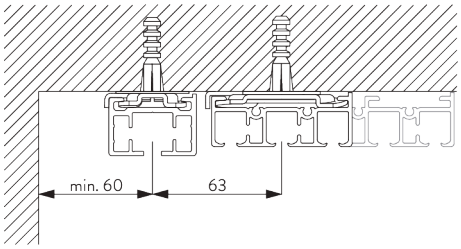



SG 3003
Clamp



SG 3004
Clamp

SYSTEM OPTIONS

A. MOTORISATION

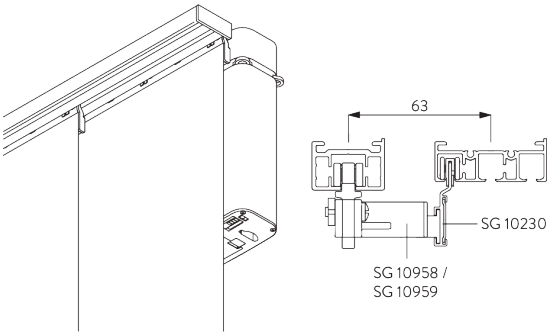

Motorised with SG 5600

- *Single stack systems: carrier SG 10958*
- *Pair stack systems: carriers SG 10958 / SG 10959*

For further details refer to the electric curtain track catalogue.

B. PANEL STACKING

Single stack

Note: dot = fixed panel

Pair stack

Note: dot = fixed panel

Other variations are possible.

PARTS

A. STANDARD PARTS

SG 2006

Bottom bar 28x3 mm

SG 2539

Tape



SG 3003

Clamp

SG 10123

Profile 3-channel



SG 10140

Angle



SG 10143

Cover



SG 10146

Angle



SG 10156

End stop

SG 10159

Countersunk head screw 3.5x13



SG 10200

2C roller

SG 10230

Carrier alu

SG 10252

End cover left

SG 10253

End cover right



SG 10958

Panel carrier for electric track



SG 10959

Panel carrier for electric track

B. OPTIONAL PARTS

SG 2005

Bottom bar 40x5 mm



SG 6024

Connection bridge

SG 10124

Profile 4-channel

SG 10125

Profile 5-channel



SG 10144

End cover



SG 10145

End cover

The Architects of Silence

Silent Gliss is the leading global supplier of premium interior window treatments. Since 1952 we have been tirelessly committed to the development of the world's smoothest, quietest systems using state of the art technology.

Driven by customer needs, Silent Gliss offers functional and durable products. Expert technical advice coupled with installation and support services complete the offer. Silent Gliss stands for innovative, sustainable, tailor made solutions, exceptional design and first-class quality.

Silent Gliss Ltd.
Pyramid Business Park
Poorhole Lane, Broadstairs
Kent CT10 2PT
United Kingdom
T +44 1843 863571
F +44 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd.
Pyramid Business Park
Poorhole Lane, Broadstairs
Kent CT10 2PT
United Kingdom
T +44 1843 874250
F +44 1843 864503
info@silentglissglobal.com

Silent Gliss Blinds Trading LLC
Office 1906
The H Hotel Complex
Trade Center First
Dubai
United Arab Emirates
T +971 4 7050318
info@silentgliss.ae

silentgliss.co.uk
silentglissglobal.com
silentgliss.ae