
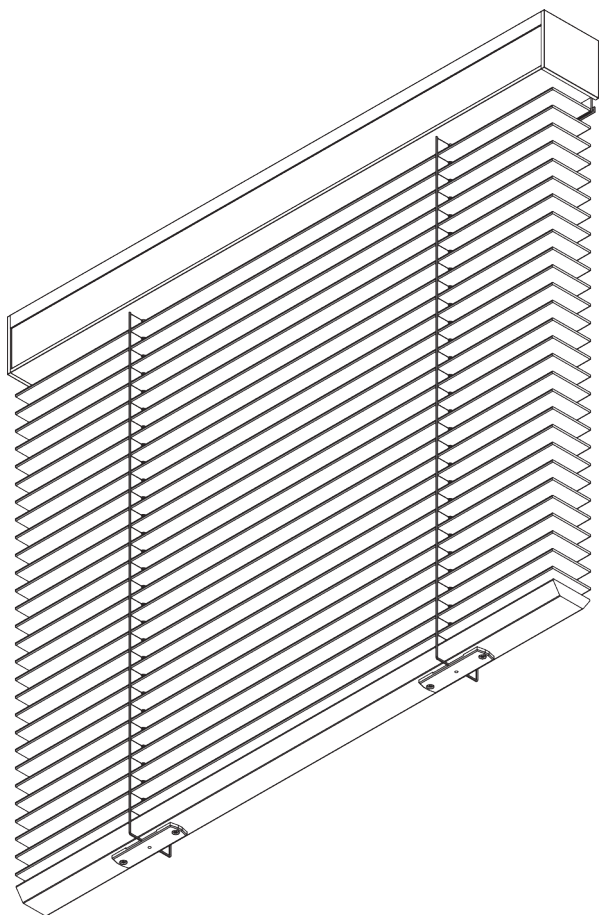


SG 8960



PRODUCT INFORMATION

- **Operation:** motorised
- **Range:** L
- **Fitting:** ceiling, wall
- **Colours:** refer to Silent Gliss slat collection

Features:

- Optimised light control
- Various control options
- Wood, aluminium and leather slats
- Slat width: 50 mm
- Headrail slat cover
- Choice of ladder cord or decorative slat tape

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS

Wood / Leather: 2.4 m Aluminium: 3.6 m	65 cm	Wood / Leather: 2.75 m Aluminium: 3.6 m	Wood / Leather: 4.6 m ² Aluminium: 10 m ²

Slat stack heights

Note: stack size will be larger when tapes are used


Wooden											
50 mm		X	60	90	120	150	180	210	240	275	
			12	15	17	20	22	25	27	30	
(cm)											
Leather											
50 mm		X	60	90	120	150	180	210	240	275	
			16	18	20	22	24	26	28	30	
(cm)											
Aluminium											
50 mm		X	100	200	300	360					
			10	13	17	20					
(cm)											

B. PROFILE

Profile information

SG 8935 Profile	SG 8936 Profile

C. HOW TO
MEASURE

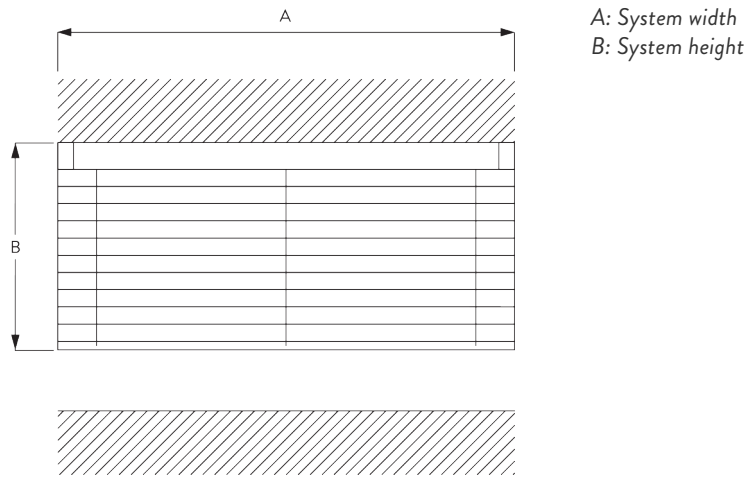

D. SPECIFICATION
TEXT


Silent Gliss SG 8960 Electrically Operated Venetian Blind System. Supplied made to measure and complete comprising aluminium headrail SG 8935 and cover SG 8936 incorporating matching colour slat. System fixed with clamps SG 3033 to ceiling or wall at 450mm intervals plus one at 100mm from each end. Supplied with motor SG 11095 with operation by 5 position switch SG 0613 which permits raising, lowering and tilting of the slats / operation by third party control system subject to suitable interface by others. Optional motor SG 11096 with integrated receiver for use with radio control system SG Control L (hand, wall mounted transmitters and SG Move app). Can be switched by SG Control R radio control system by external receiver. All wireless controls at extra cost. Slat colours to be chosen from Silent Gliss 50mm aluminium / wood / leather range.

FITTING

A. FITTING
INFORMATION


For detailed fitting information, visit the Silent Gliss website.


Fixing points



B. CEILING FITTING

Clamp SG 3003

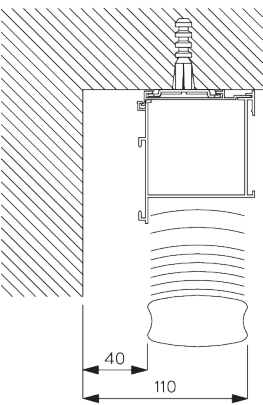





SG 3003

Clamp

C. WALL FITTING



Clamp SG 3003

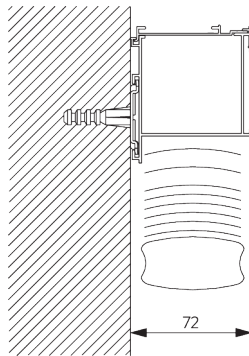

SG 3003


Clamp

D. FITTING WITH SIDE GUIDE OPTION




SG 8235

Side guide wire base short




SG 8236

Side guide wire base long




SG 8237

Side guide wire holder



SG 8249

Side guide device




SG 10120

Side guide wire ø 0.9 mm


SYSTEM OPTIONS

A. HEADRAIL SLAT COVER



- A slat is inserted into the headrail for perfect matching of colours and materials to avoid the need to fit a cumbersome valance.
- For leather slat blinds there is the option of a leather covered headrail at an additional cost.
- Leather covered slats cannot be specified with decorative (external) slat tapes. The blind hardware is supplied matching the slat colour.

B. SIDE GUIDES

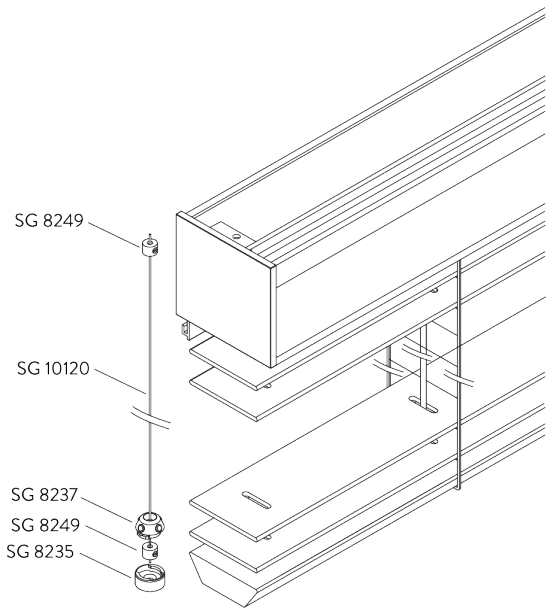

- Additional parts:
- 2x SG 8235 Side guide wire base short
 - 2x SG 8237 Side guide wire holder
 - 4x SG 8249 Side guide device
 - 2x SG 10120 Side guide wire ø 0.9 mm

- Note:
- Up to 15° from vertical

MOTOR & CONTROLS

A. MOTOR FEATURES

Motors	SG 11095	SG 11328
Motor Features		
Soft start / stop	●	
Electronic end-stop	●	
Electronic revolution counter (unlimited revolution)	●	
Mechanical end-stop		●
Mechanical revolution counter (limited revolution)		●
Noiseless stop	●	●
IP class	IP 54	IP 44
Control Features		
Mains power control	●	●
SG Control N (external receiver required)	●	●
SG Control R (external receiver required)	●	●
Suitable for most major home automation systems (with suitable interface)	●	●

B. MOTOR

SPECIFICATIONS

Motors	Voltage	Current	Frequency	Speed	Frequency receiver
SG 11095	230 V AC	0.5 A	50 Hz	35 rpm	n/a
SG 11328	120 V AC	1.3 A	60 Hz	30 rpm	n/a

C. OPERATING

METHODS

See catalogue "controls" for details.

Wall Switch



System can be operated by fixed wall switch.

SG Control N



Various radio hand-held and wall transmitters available.



Silent Gliss Move App.

SG Control R



Various radio hand-held and wall transmitters available.
An external receiver is required.

D. WIRING




DIAGRAMS










Refer to Silent Gliss website.

PARTS

A. STANDARD PARTS

	SG 3003 Clamp
	SG 8935 Profile
	SG 8936 Profile
	SG 9917 Hirschmann portable socket-outlet STAK 3 N
	SG 11095 Motor 230V AC, JA 04/35 comfort

B. OPTIONAL PARTS

	SG 8235 Side guide wire base short
	SG 8236 Side guide wire base long
	SG 8237 Side guide wire holder
	SG 8249 Side guide device
	SG 9916 Hirschmann plug set
	SG 10120 Side guide wire ø 0.9 mm
	SG 11328 Motor 120V AC, JA 08/30 soft, UL
	SG 11900 Move Server
	SG 20336 Hand held transmitter 8 channel
	SG 20913 Wall switch single channel
	SG 20914 Wall switch 8 channel
	SG 20917 Pattress box
	SG 20919 Control module motor type R

